

SENSORES





# SENSORES DE INTERIOR

Sensor de movimiento con detección 360°.

*Motion sensor with a 360° detection.*



## SUPERFICIE


20 uds

Ref.

Retardo

Potencia

Color



SENSOR-SUP360

Min  
10±3seg  
Max  
15±2min

Incand.	LED
1200W (220-240V)	600W (220-240V)
800W (110-130V)	300W (110-130V)



## SUPERFICIE SLIM


20 uds

Ref.

Retardo

Potencia

Color



SENSOR-SUP360-XS

Min  
10±3seg  
Max  
15±2min

Incand.	LED
2000W (220-240V)	1000W (220-240V)



## EMPOTRABLE


20 uds

Ref.

Retardo

Potencia

Color



SENSOR-EMP360

Min  
10±3seg  
Max  
15±2min

Incand.	LED
1200W (220-240V)	600W (220-240V)



## EMPOTRABLE MINI


20 uds

Ref.

Retardo

Potencia

Color



SENSOR-EMP360-XS

Min  
10±2seg  
Max  
7±2min

Incand.	LED
300W (220-240V)	150W (220-240V)
150W (110-130V)	75W (110-130V)





SUPERFICIE IP66



SUPERFICIE IP44

# SENSORES DE EXTERIOR

Sensor de movimiento con detección 180°.

Motion sensor with a 180° detection.

  
**DISTANCIA Y RANGO**  
 12m / 180°

  
 50-60Hz

  
**AJUSTABLE LUZ**  
 3-2000 lux


  
**RETARDO AJUSTABLE**

  
**SENSOR MOVIMIENTO**

  
**SENSOR CREPUSCULAR**

## SUPERFICIE IP44

 20 uds



Ref.

Retardo

Potencia

Color

SENSOR-180IP44

Min  
10±3seg  
  
Max  
7±2min


Incand.  
  
1200W  
(220-240V)  
  
800W  
(110-130V)

LED  
  
300W  
(220-240V)  
  
200W  
(110-130V)

  
BLANCO

## SUPERFICIE IP65

 20 uds

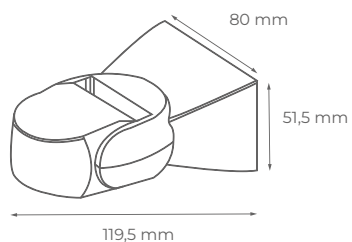

Ref.

Retardo

Potencia

Color

SENSOR-180IP65-BL

Min  
10±3seg  
  
Max  
15±2min

Incand.  
  
1200W  
(220-240V)  
  
800W  
(110-130V)

LED  
  
300W  
(220-240V)  
  
200W  
(110-130V)

  
BLANCO

  
NEGRO



# SENSOR MICROWAVE

Sensor movimiento por microondas.

Surface microwave movement sensor.



**DISTANCIA Y RANGO PARED**  
5-15m / 180°



**DISTANCIA Y RANGO TECHO**  
1-8m / 360°



50-60Hz



**AJUSTABLE LUZ**  
3-2000 lux



**RETARDO AJUSTABLE**



**SENSOR MOVIMIENTO**



**SENSOR CREPUSCULAR**

## SENSOR MICROWAVE


20 uds

Ref.

Retardo

Potencia

Color



SENSOR-MICROWAVE

Min  
5±3seg  
Max  
15±2min

Incand.  
1200W  
(220-240V)

LED  
300W  
(220-240V)

BLANCO



# PASTILLAS Y REGULADORES

Permite ajustar la intensidad de la luz.

*Allows adjusting the intensity of the light*



IP20




50-60Hz

## RF + PUSH

20 uds

Ref.

W



REG-PUSH

INC (400W-220V)  
(200W-110)  
LED (200W-220V)  
(100W-110V)




## WIFI+ RF + PUSH

20 uds

Ref.

W

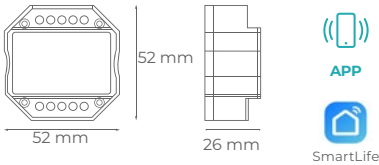

REG-WIFI

INC (400W-220V)  
(200W-110)  
LED (200W-220V)  
(100W-110V)



## MANDO RF PARA PASTILLAS

20 uds

Ref.




REMOTE-REG-PUSH

## DALI

20 uds

Ref.

W

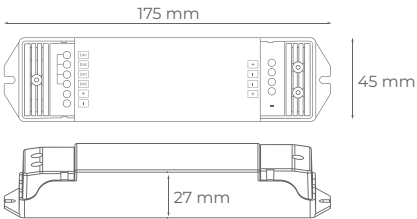

REG-DALI-DA1

180W (12Vdc)  
360W (24/36Vdc)  
480W (48Vdc)

